

HDMI Routing Switcher HDMI 4X4



Bridge RS_HDMI 4X4



Descriptions

Bridge RS 4x4 has HDMI Routing Switcher. four signal input and four signal output.
Maximum 1080P Full HD signal and HD, SD signal is input receive signal.
Also, a multi-view mode, out format fixed mode output of the three modes.

Feature

- HDMI 4 input (Up to 1080P FHD)
- HDMI 4 output (Up to 1080P FHD)
- Supports HDMI v1.3
- Out Format Fixed Mode
- MultiView Mode
- Dip-Switch Configuration
- RCP & Ethernet remote configuration
- 12V 2A DC Power supply

Physical

Dimension (W x H x D)	483 x 157 x 44 (mm)
Weight	990Kg
Power Level	+12 VDC
Power Consumption	13Watts
Operating Temperature	-20 °C ~ 70 °C
Humidity	0 to 95% RH, non-condensing

Drawing Dimension [mm]

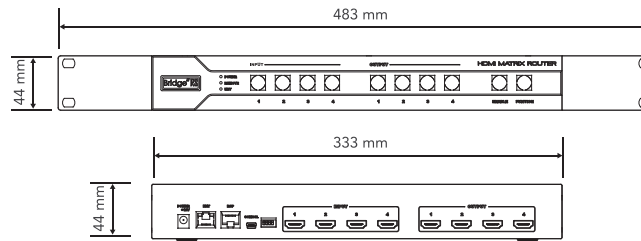



Image View



Digital Video Specs.

- Supports HDMI formats
- SD Format : 525/29.97(NTSC), 625/25(PAL), 480P, 576P
- HD Format : 720P(24/25/30/50/59.94/60)
1080i(50,59.94,60)
1080P(24/25/30/sf24/50/59.94/60)

DIP S/W Function

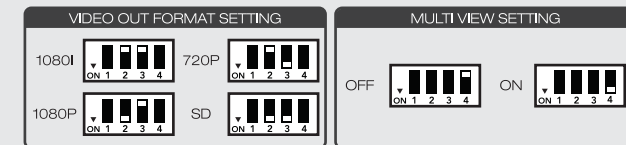

Format Support

Input Format	Output Format	Legend: ● SD ● 720p ● 1080i ● 1080p																					
		480i (NTSC)	576i (PAL)	480P	576P	720P24	720P25	720P30	720P50	720P59.94	720P60	1080i50	1080i59.94	1080i60	1080p24	1080p25	1080p30	1080pF24	1080p50	1080p59.94	1080p60		
480i (NTSC)		●																					
576i (PAL)			●																				
480P		●																					
576P			●																				
720P24																							
720P25																							
720P30																							
720P50																							
720P59.94																							
720P60																							
1080i50																							
1080i59.94																							
1080i60																							
1080p24																							
1080p25																							
1080p30																							
1080psF24																							
1080p50																							
1080p59.94																							
1080p60																							